



L10 Series (L10-315 shown)

Features

- 15"D shelf features clamping brackets and rear stops to hold non-rackmount electronic components.
- Choice of 2RU, 3RU and 4RU panel space heights.
- Rugged 16-gauge US steel construction.
- Supports up to 50 lbs.
- Ventilated bottom allows heat dissipation.
- Finished in durable black powder epoxy.

Description

Lowell Series L10 shelves are 19"W x 15"D assemblies engineered to provide secure mounting of non-rackmount equipment in 19" wide equipment racks and cabinets. The L10 Series features two adjustable height "hold-down" brackets that clamp down on equipment to prevent unintentional movement from vibrations or accidental knocking. Additionally, to prevent marring and scratching of equipment, the clamps are outfitted with a protective rubber strip. Two adjustable rear stops are also included to help hold chassis components in place when buttons or controls are depressed. Shelves are ideal for use with consumer electronics, power supplies and chassis-style components of all kinds.


A & E Specifications

The shelf for 19"W rackmount use shall be Lowell 15"D Model _____ (L10-315, L10-515, L10-715). Shelf shall have a panel space height of ____ (2RU, 3RU, 4RU). It shall include two adjustable-height hold-down brackets for top support of non-rackmount equipment, two angle stops for rear alignment of equipment and bottom ventilation. It shall be 16-gauge US steel finished in black powder epoxy. Load capacity shall be 50 lbs.

L10 Series shelves are designed to attach to front mounting rails in 19"W E.I.A. racks and have a conservative load rating of 50lbs. They are offered in 2RU, 3RU and 4RU sizes. They are precision formed from a single piece of 16 gauge US steel and include a front and rear flange that is .438"H to provide added strength and to help retain shelved items. The bottom rear is ventilated and includes openings to adjust angle-bracket stop devices. The sides include obround slots to adjust the height of hold-down brackets for secure positioning on equipment. Each shelf includes two hold-down bracket angles with rubber bumpers, two adjustable stop angles, mounting hardware and smooth black powder epoxy finish.


19"W SHELF SPECIFICATIONS

Model	Description	Rack Units (A)	Panel Space (A)	Depth (B)	Useable Width	Weight	Load Rating
L10-315	Equipment shelf w lock-down brackets	2 RU	3.5"	15"	17.312"	7 lbs.	50 lbs.
L10-515	Equipment shelf w lock-down brackets	3 RU	5.25"	15"	17.312"	7.75 lbs.	50 lbs.
L10-715	Equipment shelf w lock-down brackets	4 RU	7"	15"	17.312"	8.5 lbs.	50 lbs.

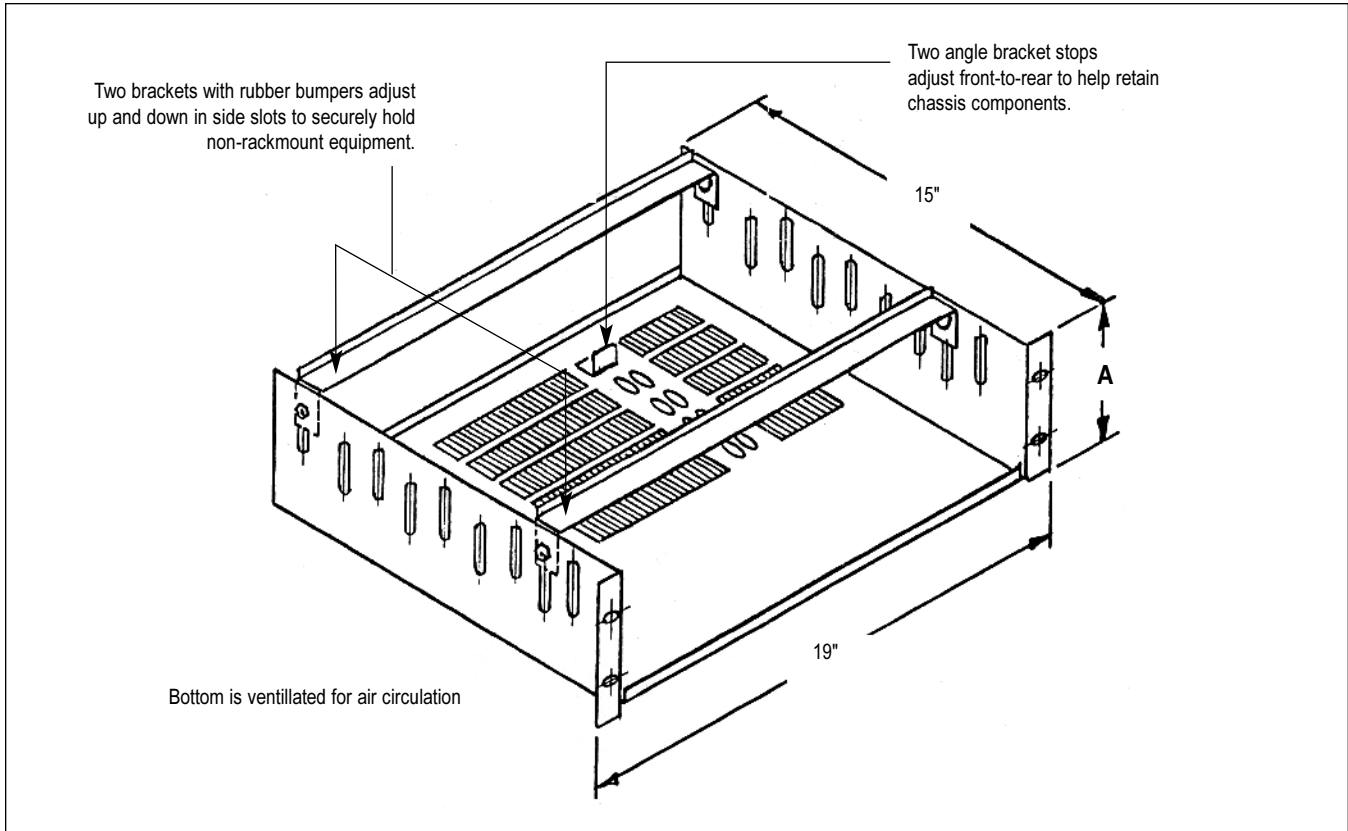

L10 Series dimensions

Panel Mounting Screws (order separately)

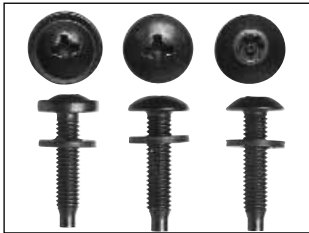

RSP Phillips Finish Head
RS Phillips Truss Head
RSV Torx® Star Post Head

NEW RSR Robertson square head available!



RSP-500 / RS-500 Jars

ALL screws have 5.1 hardness and include PilotPoint™ tip and captive washer!

Model	Description	Quantity
RSP-25	Hdwr phillips finish head pilot pt w washers Blk 10-32x.875	25 pc bag
RSP-100	Hdwr phillips finish head pilot pt w washers Blk 10-32x.875	100 pc bag
RSP-500	Hdwr phillips finish head pilot pt w washers Blk 10-32x.875	500 pc jar
RS-25	Hdwr phillips truss head pilot pt w washers Blk 10-32x.875	25 pc bag
RS-100	Hdwr phillips truss head pilot pt w washers Blk 10-32x.875	100 pc bag
RS-500	Hdwr phillips truss head pilot pt w washers Blk 10-32x.875	500 pc jar
RSR-50	Hdwr robertson SQ- head pilot pt w washers Blk 10-32x.875	50 pc bag
RSR-BIT	Hdwr torx pin drive bit for RSR Series screws	1 Qty
RSV-50	Hdwr torx star post security pilot pt w washers Blk 10-32x.875	50 pc bag
RSV-BIT	Hdwr torx pin drive bit for RSV Series screws	1 Qty