

Quality Features

- Choice of two models for 36" D Lowell Series L279 racks.
- Rugged, fully-welded US steel construction.
- Bases feature cable access in the center and on the sides to facilitate wiring in and between rack installations.
- Includes hardware for easy bolt-on installation.
- Finished in durable wrinkle black powder epoxy.

Description

Lowell Model MB236 Mobile Platform Base is a inner platform design that mounts inside the rack frame to provide the benefits of mobility and a floor positioned flush to the bottom rack space. This model is often specified to support extra-heavy equipment that is mounted in the lowest racking position. The base features heavy-duty 3" swivel casters in the front and swivel locking casters in the rear. The casters are positioned inside the platform so that the increase in overall height of the rack when installed is only 1.25". The casters have a load rating of 350 lb each (1400 lbs total). To facilitate cable access through the bottom, there is a center opening size 13" x 20". Additionally, there are cable pass-thru openings on the sides that match up to the side openings on L279 Series racks to facilitate wiring between ganged rack installations. Construction is 14 gauge steel finished in durable wrinkle black powder epoxy.

Lowell Model PB236 Platform Base is identical to the MB236 Mobile Platform Base above without casters, hence no increase in the cabinet height when installed.



MB236




PB236

Note: Bases may not be used with seismic versions (-S) of Lowell racks.

36" D BASES FOR L279 RACK SERIES

Model	Description	Casters	Height Increase	Size O.A.	Size Inside	Open Access	Weight	Mounts Series*
MB227	Mobile Platform	3" Recessed	1.25"	22.812"W x 35.75"D x 3"H	19.812"W x 31.75"D	13"W x 20"D	38 lbs.	L279
PB227	Stationary Platform	N.A.	0"	22.812"W x 35.75"D x 3"H	19.812"W x 31.75"D	13"W x 20"D	34 lbs.	L279

*NOTE: Bases may not be used with seismic versions (-S) of Lowell racks.

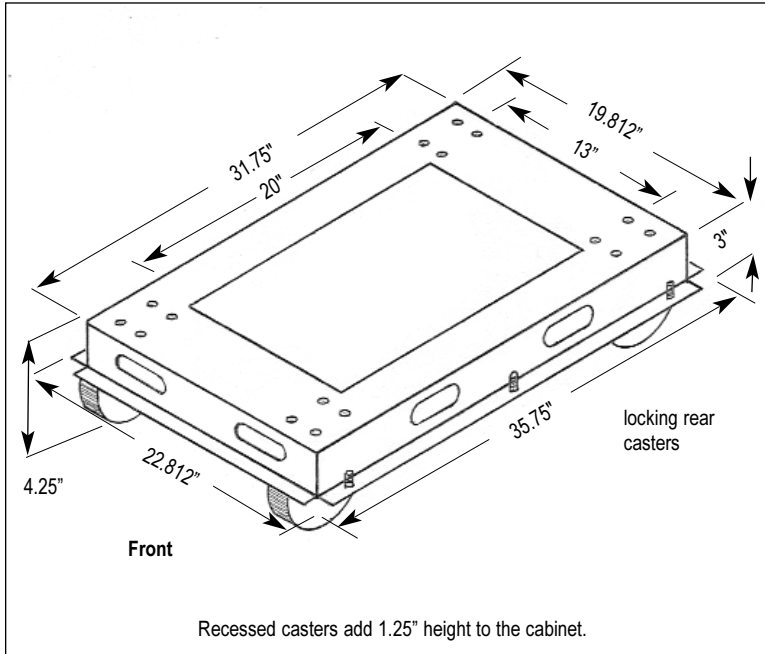

Model MB236


A & E Specifications

The mobile platform base for 36"D Lowell Series L279 racks shall be Lowell Model MB236. The platform base shall be of an inner platform design that mounts inside the rack frame to add the benefits of mobility and a floor positioned flush to the bottom rack space. The heavy-duty 3" swivel/swivel locking casters shall be positioned inside the platform so that the increase in overall height of the rack/cabinet when installed is only 1.25". The casters shall have a load rating of 350 lb each (1400 lbs total). The base shall facilitate cable access through a center opening size 13" x 20". The base shall also have side cable access via cable pass-thru openings that align with the side openings on ganging rack Series L279. Mounting hardware to attach the base to the rack shall be supplied. Construction shall be 14 gauge welded steel finished in black wrinkle powder epoxy.

Open Frame
Floor

Solid Side
Floor &
Desk

Wallmount
Surface &
Recessed

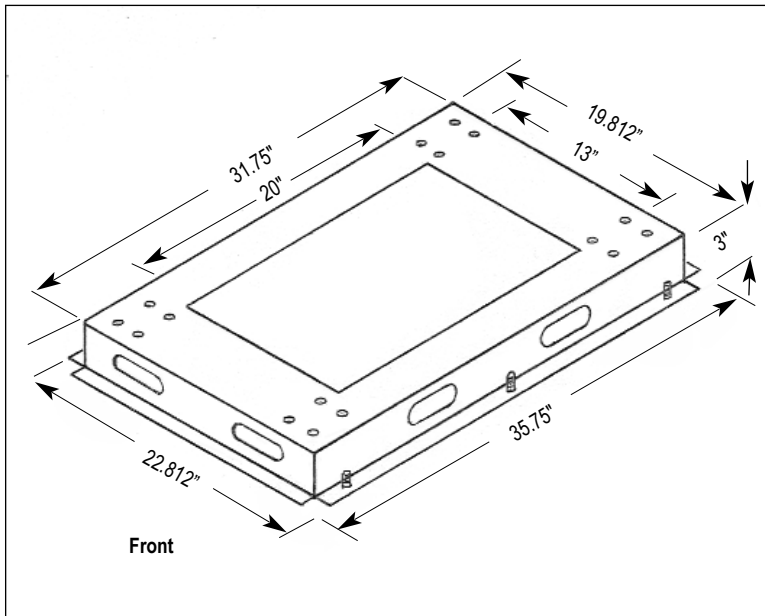

Model PB236

The stationary platform base for 36"D Lowell Series L279 racks shall be Lowell Model PB236. The platform base shall be of an inner platform design that mounts inside the rack frame to add the benefits of a floor positioned flush to the bottom rack space. The installed base shall not increase the overall height of the rack/cabinet when installed. The base shall facilitate cable access through a center opening size 13" x 20". The base shall also have side cable access via cable pass-thru openings that align with the side openings on ganging rack Series L279. Mounting hardware to attach the base to the rack shall be supplied. Construction shall be 14 gauge welded steel finished in black wrinkle powder epoxy.

Panel &
Accessories

Thermal &
Wire Mngmt