

Non-metallic flexible conduit rotates in any direction.

CIRCUIT 1:
Three duplex (NEMA 20A)

CIRCUIT 2:
Eight single (NEMA 15A)



Mounting brackets

ACS Series Model No.

ACS-2014-2C-HW

AC Power Strip w/Two Circuits



Two-circuit power strip with 14 NEMA receptacles and a non-metallic flexible whip with pigtail leads, is ideal for installations where some equipment has higher power demands than other equipment.

FEATURES

POWER RATING: 120VAC, 60Hz, 20A (each circuit)

CHASSIS: 30" x 2" x 2"H heavy gauge steel chassis with black powder epoxy finish

TERMINATION: Hardwired non-metallic flexible conduit with pigtail leads rotates in any direction. The 6 ft. conduit can be trimmed in the field if needed.

CIRCUITS & RECEPTACLES:

- Circuit 1 powers three NEMA 5-20R duplex receptacles
- Circuit 2 powers eight NEMA 5-15R single receptacles

UNIVERSAL MOUNTING BRACKETS: The universal brackets allow for power strip installation in a variety of applications with receptacles facing front, center or rear. Brackets are engineered with multiple mounting points and include two types of hardware to facilitate easy installation in a rack with adjustable or fixed rails, to a wall, or under a desk/counter. The brackets can be mounted so they are exposed for easy access or concealed beneath the power strip for an aesthetically cleaner installation.



CERTIFICATION: ETL Listed in U.S./Canada

ORIGIN: Assembled in U.S.A. with global components


A&E SPECIFICATIONS

The two-circuit power strip shall be Lowell model ACS-2014-2C-HW, which shall have a power rating of 120VAC 60Hz 20A and feature three (3) NEMA 5-20R duplex receptacles on one circuit and eight (8) NEMA 5-15R single receptacles on the other circuit. Termination shall be via a 6 ft. non-metallic flexible conduit with pigtail leads. The power strip shall be made in the U.S.A. with global components, and include universal mounting brackets and hardware.


UNIVERSAL MOUNTING BRACKETS: The brackets can be mounted exposed for easy access or concealed for a cleaner install. Includes variety of hardware for versatile installation.

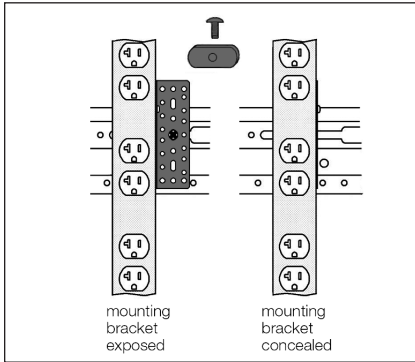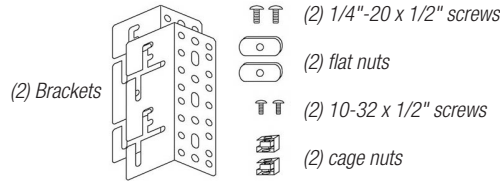

RACK w/ ADJUSTABLE RAILS
(side mount): Mount to horizontal side supports with universal brackets, 1/4"-20 screws, flat nuts.

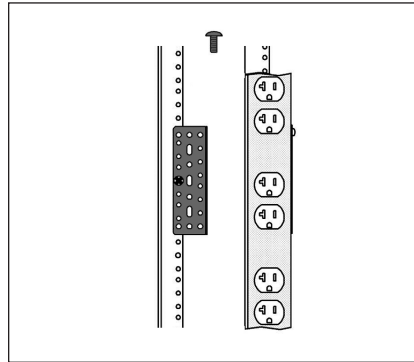


RACK w/ ADJUSTABLE RAILS
(rear mount): Mount to rear rail with universal brackets, 10-32 screws.

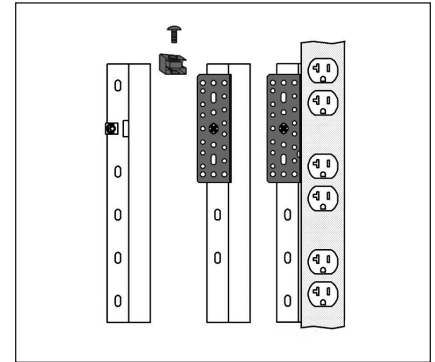


RACK w/ FIXED POSITION RAILS
(and rear Z-angle bracket): Mount to Z-angle with universal brackets, 10-32 screws, cage nuts.

HOW TO TRIM THE CONDUIT: The 6 ft. non-metallic flexible conduit can be trimmed in the field.

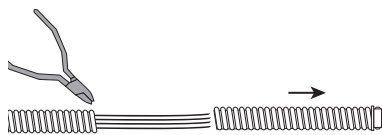

1) REMOVE EXCESS LENGTH:
Snip reinforcing rib at desired length. Bend the conduit to expose the cut and carefully cut around the conduit without cutting the wires inside. Remove excess length.



2) REMOVE CONNECTOR:
Carefully snip the last rib(s) to loosen the connector from the excess length, then twist/pull to remove it.



3) REATTACH CONNECTOR:
Twist/push the connector to attach it to the shortened conduit.

SERIES SUMMARY

Model No.	Power Rating	NEMA Receptacles	Circuits	Chassis Length	Chassis Profile	Termination	On/Off Switch	Surge Suppression	Remote Power Control	Mounting Aids	Country of Origin
ACS-1505-SW	15A	5 (15A)	1	12"	Standard	6' Det. cord	Yes	---	---	Brackets	U.S.
ACS-1505-SW-SD	15A	5 (15A)	1	12"	Standard	6' Det. cord	Yes	2-stage	---	Brackets	U.S.
ACS-1506	15A	6 (15A)	1	20"	Low	6' Fixed cord	---	1-stage	---	Clips	China
ACS-1506-WW	15A	6 (15A)	1	12"	Low	6' Fixed cord	---	---	---	Screws	U.S.
ACS-1507	15A	7 (15A)	1	12"	Low	6' Det. cord	---	---	---	Screws	U.S.
ACS-1512	15A	12 (15A)	1	32"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-1524	15A	24 (15A)	1	60"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-1524-2C	15A	24 (15A)	2	70"	Low	Pigtail leads	---	---	---	Clips	China
ACS-2012	20A	8 (15A) + 4 (20A)	1	32"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-2024	20A	16 (15A) + 8 (20A)	1	70"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-2014-HW	20A	14 (20A)	1	30"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2014-2C-HW	20A	8 (15A) + 6 (20A)	2	30"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2020-6C-HW	20A	20 (20A)	6	60"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2020-IG-6C-HW	20A	20 (I.G. 20A)	6	60"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2020-IG-10C-HW	20A	20 (I.G. 20A)	10	60"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2024-2C	20A	24 (20A)	2	70"	Low	Pigtail leads	---	---	---	Clips	China
ACS-1510-RPC	15A	10 (15A)	1	30"	Standard	6' Det. cord	---	---	Yes	Brackets	U.S.
ACS-2010-RPC-HW	20A	10 (20A)	1	30"	Standard	6' Conduit	---	---	Yes	Brackets	U.S.
ACS-2018-5C-RPC-HW	20A	18 (20A)	5	60"	Standard	6' Conduit	---	---	Yes	Brackets	U.S.
ACS-2018-5C-RPCP-HW	20A	18 (20A)	5	60"	Standard	6' Conduit	---	1-stage	Yes (P)	Brackets	U.S.

THIS SPEC

Chassis Profile = Standard profile (2" x 2"), Low profile (1.625" x 1.375")

Termination = Det. cord (detachable cord), Fixed cord (cord is attached—cannot be removed), Conduit (non-metallic flexible whip w/pigtail leads), Pigtail leads (leads at ends of chassis—no whip)

Switch = Yes (On/off rocker switch)

Surge Suppression = 1-stage (basic surge protection), 2-stage (surge protection with backup)

Remote Power Control = Some receptacles are controlled by a remote switch or sequencer (ordered separately); (P) indicates compatibility with Lowell P-Series pass-through sequencers.

Mounting Aids = Brackets (multi-hole brackets with hardware), Clips (clips and screws with wire ties), or Screws (power strips can mount to rear of US or USV Series shelves).