

Quality Features

- 50W power rating with stereo separation.
- Standard or Decora®-style plate.
- Choice of plate material includes stainless steel or plastic in white, ivory or black as noted.
- Compact single gang size blends with other wall devices.
- May be used with RMP Series rack panels (order separately).

Description

Lowell's LVCS Series stereo volume controls are compact easy-to-install controls that provide precise level adjustment of stereo speaker lines. Models are 50W and include choices of standard, Decora®-style, or adhesive rackmount plate. All mount within a single gang E.O.Box with a minimum depth requirement of 2.5".

Standard, one-piece plates are offered in brushed stainless steel or plastic (white or ivory) versions. Decora®-style two-piece plates are available in plastic (white, ivory or black) or with a stainless steel coverplate and a white or black plastic subplate. Rackmount models feature an adhesive dial scale with clear label area instead of a plate. All LVCS Series volume controls have easy to connect, phoenix-style plug-in screw termination strips for pre-wire convenience with wire capacity up to 14gauge. Attenuation is 3dB per step.


Accessory Rackmount Panel (order separately)

Lowell offers three different RMP Series pre-punched rack panels for easy installation of multiple LVC Series controls on to a rack panel. All include a rear lacing flange for wire management and a clear **PocketID™** window for inserting 1/2" labels for control identification. Choose 3RU panel Model LD8-RMP (8 positions with generous spacing) or LD9-RMP (9 positions with narrow spacing) for mounting Decora®-style 1-gang volume controls or other low-voltage devices. *Model LD9-RMP will also accept 2-gang devices.* Space saving 2RU panel Model LVC-RMP has 8 positions for mounting rackmount LVC Series volume controls*. For detailed panel specifications, see RMP Series spec sheet in the rack panel accessories section.

*Controls with standard wall plate may also be used (discard plate).

A & E Specifications

Volume control for stereo applications shall be Lowell Model _____ with a power rating 50W and attenuation per step of 3dB. Plate style shall be (standard one-piece stainless steel, one-piece plastic, Decora®-style two-piece plastic, Decora®-style two-piece stainless steel with plastic subplate, or rackmount with adhesive label). Plate color shall be _____ (brushed stainless, white, ivory, black, stainless/white, stainless/black). Controls shall mount in an E.O. Box with a minimum inside dimension of 1.875"W x 3.00"H x 2.50"D.

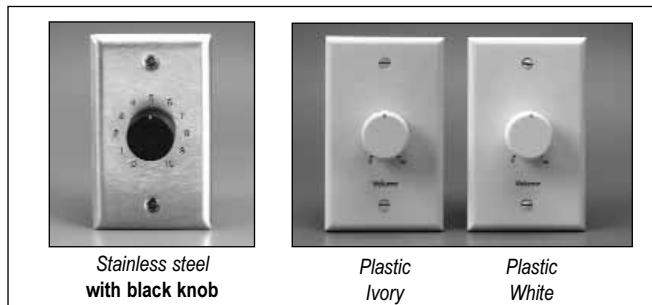


Stainless steel with black knob

Plastic Ivory

Plastic White

Standard - one-piece, 1-gang plates

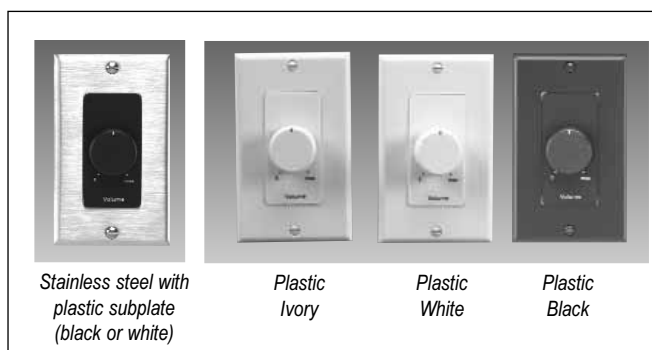


Stainless steel with plastic subplate (black or white)

Plastic Ivory

Plastic White


Plastic Black

Decora®-style - two-piece, 1-gang plates

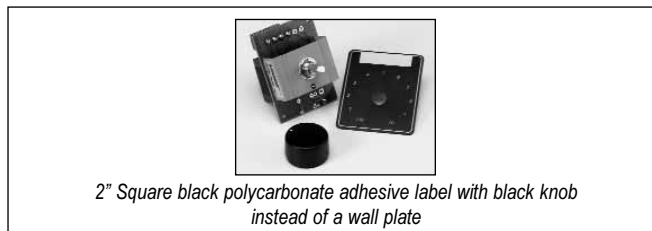

2" Square black polycarbonate adhesive label with black knob instead of a wall plate

Rackmount - adhesive dial scale

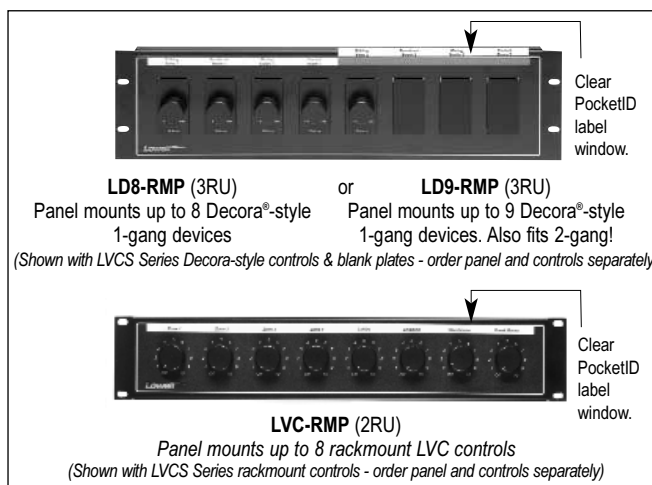

Clear PocketID label window.

LD8-RMP (3RU)

or **LD9-RMP (3RU)**

Panel mounts up to 8 Decora®-style 1-gang devices

Panel mounts up to 9 Decora®-style 1-gang devices. Also fits 2-gang!

(Shown with LVCS Series Decora-style controls & blank plates - order panel and controls separately)



Clear PocketID label window.

LVC-RMP (2RU)

Panel mounts up to 8 rackmount LVC controls

(Shown with LVCS Series rackmount controls - order panel and controls separately)

Accessory rackmount device panels with PocketID™



LVCS Series

Stereo Volume Control Attenuators

AUDIO

Model Series**	Power Rating	Type	Switch Type	Switch Positions	Attenuation Step / Total	1 Gang Plate Choices				Rackmount
						Standard 1pc. Stainless Steel (no suffix required)	Standard 1pc. Plastic (Suffix Model**)	Decora®-style Plastic (Suffix Model**)	Decora®-style Stainless/plastic (Suffix Model**)	2" Sq label (Suffix Model**)
50LVCS	50W	Auto-trans	Rotary	10-off	3dB / 33dB*	Included (base model)	-SW (white) -SI (Ivory) --	-DW (white) -DI (Ivory) -DB (black)	-DSW (SS/white) --- -DSB (SS/black)	--- --- -RM


* Models have two steps of 6dB each before off.

**Base Model is stainless steel, suffix model for other plate choices; Example: 50LVCS-SW (standard white), 50LVCS-DW (decora white), etc.

Dimensions

Model Series	Plate Width	Plate Height	Recessed Depth	Recessed Height	Recessed Width	Mounts E.O. Box (order separately)
50LVCS	2.75"	4.5"	2.5"	2.875"	1.875"	E.O. Box with 2.5" minimum depth Also mounts Lowell's P1X 1-gang surface box

12"/10" Speakers & Accessories

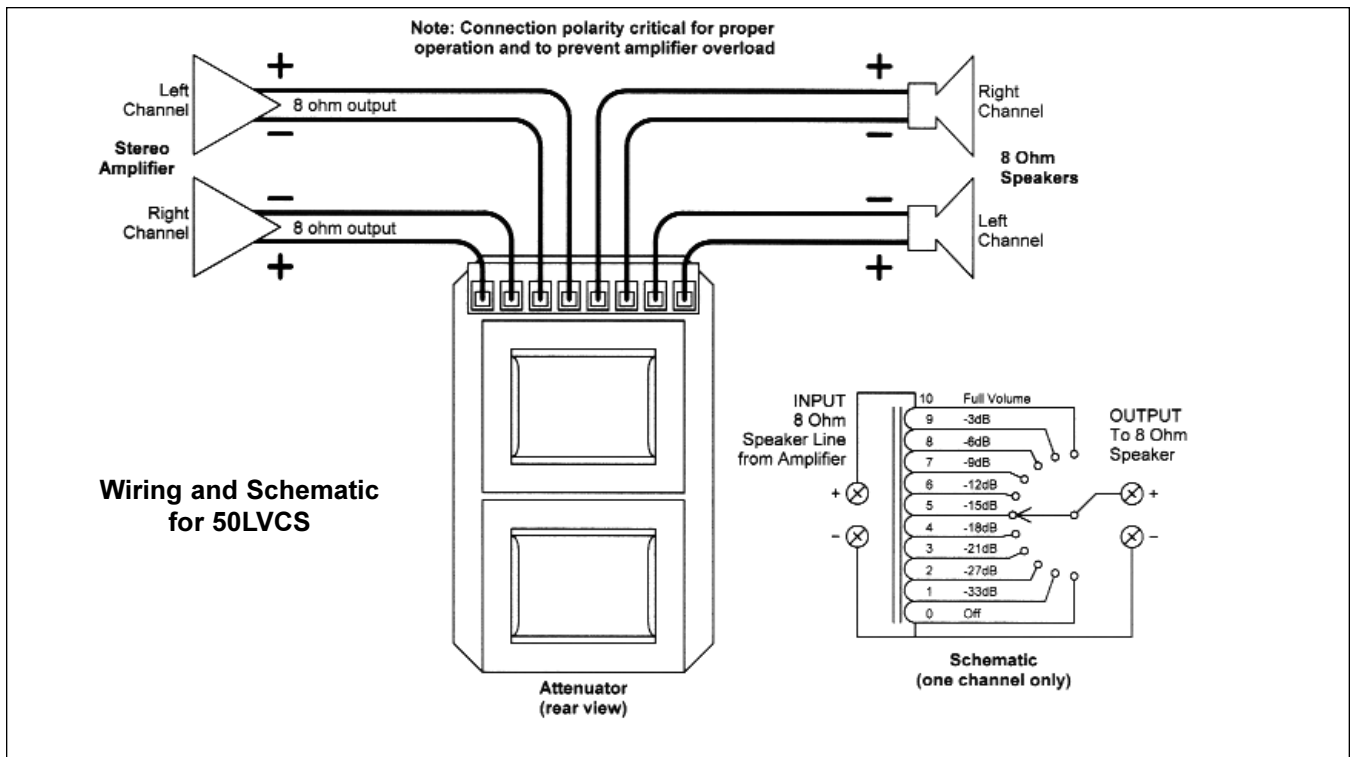

8" Speakers & Accessories

6" Speakers & Accessories

4" Speakers & Accessories

Horn Speakers & Accessories

Masking Speakers & Generators



Volume Controls