

# Rackmount Panels with Gooseneck Lights

## Description:

Model GNLT-R is a 19" EIA 1U rackmount panel with two XLR connectors in front (controlled by dimmer switch) and one XLR connector in back (controlled by on/off switch). Two gooseneck lights (12VDC, 40mA) with XLR connectors are included. Each gooseneck features four LEDs to produce a soft white light. The rugged steel chassis (19"W x 9"D x 1.75"H) has a smooth black powder epoxy finish. Includes power supply.

Model ACR-1507-GNLT has the same light features described above but also includes AC power (120VAC 60Hz 15A 1800W) with a total of seven outlets (one single outlet in front, three duplex outlets in rear). One rear duplex outlet is switched; all other outlets are unswitched (always on). Unit includes 9-ft. detachable cord with NEMA 5-15P plug.

## Features:

- Rugged steel chassis (19"W x 9"D x 1.75"H)
- Smooth black powder epoxy finish
- Made in USA with domestic and foreign parts

## Optional:

- Model GNLT-18 is a single (replacement) gooseneck light with four LEDs.

## A & E Specifications:

The 1U rackmount panel shall be Lowell Model \_\_\_\_\_. It shall include two gooseneck lights with XLR connectors (two connectors in front controlled by dimmer switch, one connector in rear controlled by on/off switch). The 19" EIA rackmount panel shall have a black powder epoxy finish and include a power supply.

[The panel shall have a power rating of 120VAC, 60Hz 15A 1800W and a total of seven outlets (one in front, six in rear). It shall include a detachable power cord with NEMA 5-15P plug.]



Model GNLT-R



Model ACR-1507-GNLT



Model GNLT-18




Model No.	Description	Gooseneck Lights	Total Outlets
GNLT-R	1U rackmount panel with gooseneck lights	2	---
ACR-1507-GNLT	1U rackmount panel with gooseneck lights & AC power	2	7
GNLT-18	Gooseneck light	1	---

One rack unit = 1.75"

# Rackmount Panels with Gooseneck Lights

## Model GNLT-R

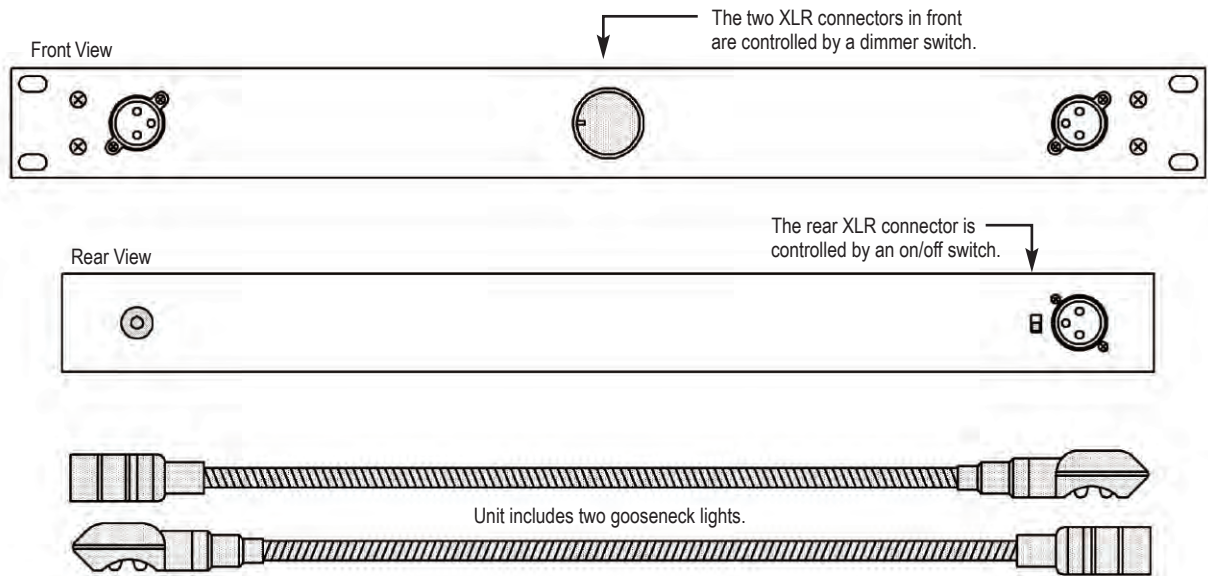

## Model ACR-1507-GNLT

