

Description

Lowell rackmount power panel Series U181 brings power distribution and switch controls to the front of the rack for convenient activation and power-down of equipment. Devices are recognized under UL Standard 1363 and include a slim (1RU) chassis with front-mounted controls, rear outlets, and a variety of configuration choices to meet performance requirements. Each assembly is finished in black powder epoxy and terminates with a grounded (Nema 5-15) molded plug.


Model U181-20A features two rear duplex outlets with 20-amp power rating. Outlets include circuit breaker protection and are controlled by a lighted rocker switch. Power panel is equipped with a six-foot cord and a grounded Nema 5-15 molded plug.

Series U181B features four rear duplex outlets with a 15-amp power rating. Outlets include circuit breaker protection and are controlled by a lighted rocker switch. Panels are equipped with a six-foot or 15-foot cord and a grounded Nema 5-15 molded plug.


Series U181RL features two front mounted 6-watt lamps with a downward deflecting hood for illuminating rackmount controls located below the power panel. Unique, dual function design is great for power distribution in racks that are located in dark or confined areas. In addition to the lamps and deflector hood, the front of the power panel includes a lighted power switch with circuit breaker, lamp On/Off switch, and a lamp brightness reostat switch. The rear of the panel features four duplex outlets with a 15-amp power rating and a six-foot or 15-foot cord and a grounded Nema 5-15 molded plug.

A & E Specifications

UL Recognized power panel shall be Lowell Model _____. Power panel shall include _____ (two duplex, four duplex) outlets on the rear of the chassis with a power rating of _____ (20A, 15A). Chassis shall be 19"W x 1.75"H x 4.375"D and terminate in a _____ (six foot, fifteen foot) cord. For confined installations, power panel shall include a front mounted and downward deflecting lamp (Series U181RL only).

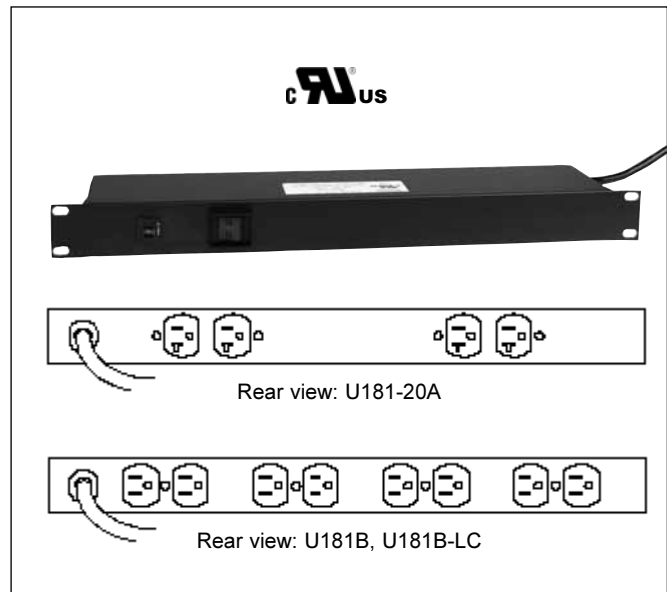

Series U181 and U181B

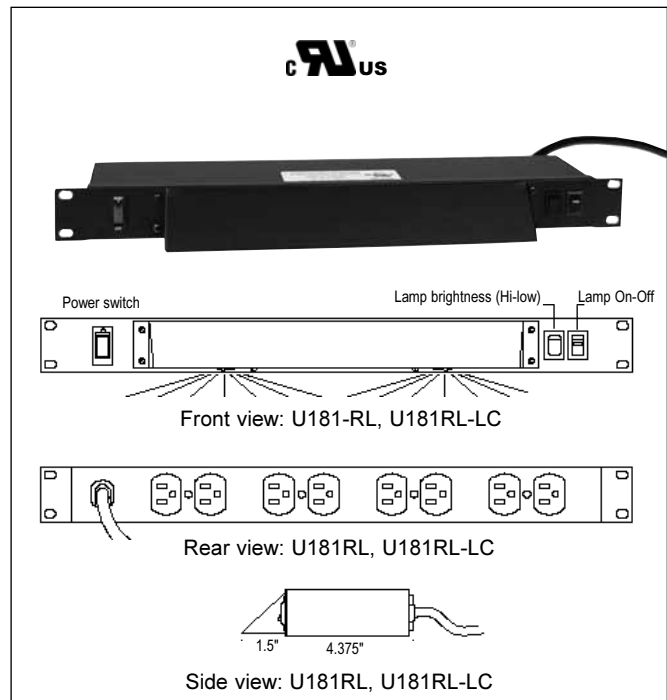

Series U181RL



U181 Series

19" Rackmount AC Power Panels with Cordset

P
O
W
E
R

U181 Series UL and CUL Recognized* Power Panels

Model	Power Rating	Rear Outlets	Size	Termination	Switch Style	Other
U181-20A	20A, 125 vac	2 duplex	19"W x 1.75"H (1RU) x 4.375"D	6-foot cord	Lighted rocker	---
U181B	15A, 125 vac	4 duplex	19"W x 1.75"H (1RU) x 4.375"D	6-foot cord	Lighted rocker	---
U181B-LC	15A, 125 vac	4 duplex	19"W x 1.75"H (1RU) x 4.375"D	15-foot cord	Lighted rocker	---
U181RL	15A, 125 vac	4 duplex	19"W x 1.75"H (1RU) x 4.375"D	6-foot cord	Lighted rocker	Incl. two 6 watt lamps
U181RL-LC	15A, 125 vac	4 duplex	19"W x 1.75"H (1RU) x 4.375"D	15-foot cord	Lighted rocker	Incl. two 6 watt lamps

*UL File No. E201878 (UL1363)



AC
Rackmount
19" EIA

AC Strips
Rackmount
Vertical

AC
Loadcenters
(sequenced)

AC Surge
Protection
/ Filtering

AC
Remotely
Controlled

Low Voltage
Sequencers
Accessories

Panels with Cord