

Channel rails distribute the weight of a speaker assembly to the ceiling support structure, reducing the likelihood of (2' x 2' or 2' x 4') tiles sagging under the weight of the speaker, which helps maintain the overall aesthetics of the installation. Channel rails are often required by local building codes for safety purposes.

*Note that speaker installation should always be performed according to all building codes and regulations.*


**FEATURES:**

- **Construction:** Formed construction, lightweight with rigid support
- **Material:** 20-gauge galvanized steel
- **Length:** 23.75" long
- **Quantity:** One pair
- **Mounting Aids:**
  - The punched holes in the rails will allow any Lowell square recessed backbox to be mounted with screws
  - Includes holes for seismic anchoring where required by code
  - Hardware: (4) 8-18 x 3/8" Phillips pan-head sheet metal screws
- **Origin:** Made in the U.S.A.
- **A&E Specifications:** The channel rails shall be Lowell model SS24, which shall include one pair of 23.75" rails formed from galvanized steel and engineered to distribute the weight of a speaker assembly to the ceiling support system in a 2'x 2' or 2'x 4' suspended ceiling installation. The rails shall include mounting hardware.



**SS Series Summary**

Model No.	Description	Material	Length	Quantity	Origin
<b>SS24</b>	<b>Channel Rails</b>	<b>Galvanized Steel</b>	<b>23.75"</b>	<b>1 pair</b>	<b>U.S.A.</b>
SS30	Channel Rails	Galvanized Steel	30"	1 pair	U.S.A.
SS48	Channel Rails	Galvanized Steel	48"	1 pair	U.S.A.

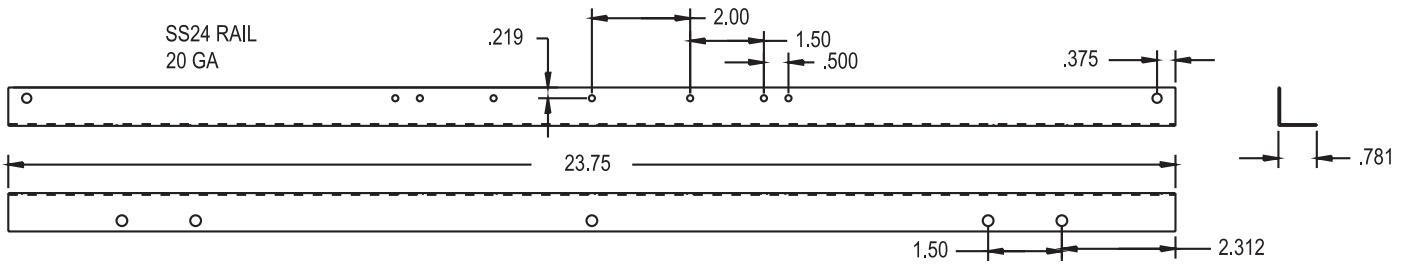

Measurements shown as inches

